


Screen control cable

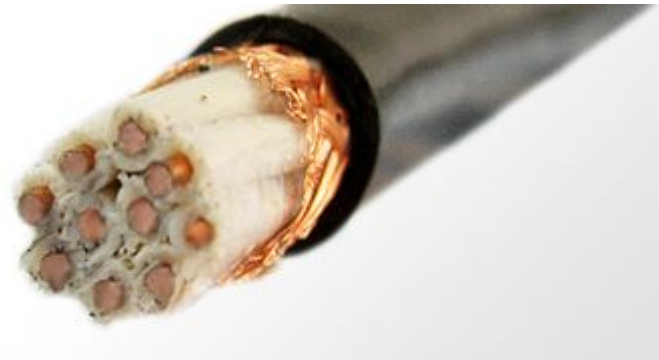

Application: Copper Conductor PVC Insulated and Sheathed Screen control cable is used for control, loop control & line protection when the rated voltage is 450/750 or less.

Standards: IEC502, IEC332-3

Conductor: Cu

Insulation: PVC

Sheath: PVC

Sheath Color: Black or Gray (Bespoke cable)

Bending Radius: Single core: $20D \pm 0.05$, multi-core: $15D \pm 0.05$

Temperature Rating: 0°C to 90°C

(PVC cable) PVC Insulated and Sheathed Screen control cable

Nominal cross sectional area of conductor(mm ²)	Approx, overall diameter(mm)
2×0.75	8
2×2.5	10.5
3×0.75	8.4
3×6	15
4×0.75	9
4×6	16.5
8×0.75	11.5
8×6	20
16×0.75	16
16×2.5	21
30×0.75	19
30×2.5	29.5